

FX fanless series

# FX5505

C-M Small System with VGA, 1S, 1LAN, 4USB, Audio, TV Out and CF/PCMCIA



Features

- Fanless and Low Power Consumption Design
- Intel 600MHz Celeron-M
- Intel 852GME + ICH4 Chipset With AGPX4 GPU
- 1 DIMM Socket With 512MB DDR-SDRAM
- Software Programmable Watchdog
- CPU Voltage and Temperature Monitoring
- 1 PCMCIA Socket


Specifications

**CPU Board:** Intel 600MHz Celeron-M CPU  
One DDR socket up to 1GB DDR-SDRAM

**I/O Outlets:** 1 VGA  
4 USB 2.0 connectors  
1 RJ45 (Realtek RTL8100X chipset, 10/100 Base-TX)  
1 RS-232 and TV out connectors  
3 Audio connectors (Line-In, Line-Out and Micro Phone)  
1 PCMCIA Socket for I/O modules  
1 Digital I/O Connector (4 In/4 Out)  
1 DC-In connector  
1 Push Button reset switch  
1 Power Push Button switch

**Storage Bay:** One 2.5" HDD space, and 1 CompactFlash slot.  
**LED Indicators:** 1 power LED, 1 hard disk access LED, 1 LAN-Access LED, and 1 Standby LED.  
**Power Req.:** DC 12V~24V, 28VA maximum.

**Operating Temperature:** 0~ 50 degree C. (32~113 degree F.)  
**Dimensions:** 203mm (L) x 148mm (W) x 55mm (H)  
**Accessory:** 1 pluggable 3-pin terminal block for power input  
1 pluggable 10-pin terminal block for Digital I/O signals

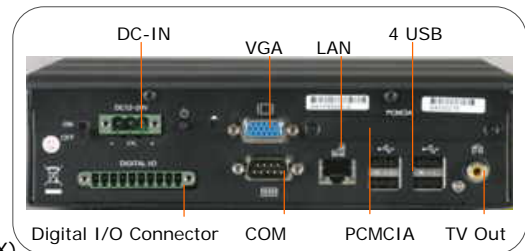

Order Information

Model	Description	Drivers
FX5505	Celeron-M 600Mhz CPU Enclosure with VGA, 1LAN, 4USB, 1S, Audio, TV out, CF/PCMCIA socket, Digital I/O and 512MB DDR-SDRAM	* VGA/Audio Win95/98/NT/2K/XP * LAN Novell 3.X / 4.X, Win95/98/NT, Linux, NDIS, MSLAN * USB Win95/98/NT/2K/XP



FabiaTech Corp.

TEL:886-2-22789586 FAX:886-2-22789575  
4F-3, No.18, Lane 609, Chung-Hsin Rd., Sec.5, San-Chung City, Taipei Hsien, Taiwan, R.O.C.

www.fabiatech.com