

FX fanless series

FX5404

C-M Small System with VGA,2S,2LAN,4USB,Audio, CF, and Mini PCI



Features

- Fanless and low power consumption design
- Intel Celeron-M CPU
- 512MB DDR SDRAM inside system
- One PS/2 KB/MS
- One VGA
- 2 LAN (1 Giga +1 100/10 Base-T)
- 2 COM Ports
- 4USB(V2.0)
- One CompactFlash Slot
- One 2.5" HDD space
- 1 Mini PCI Slot
- 4 LED Indicators

Specifications

CPU Board: Intel Celeron-M CPU board with 512MB DDR-RAM

I/O Outlets: 1 PS/2 Keyboard/Mouse connector
 1 VGA connector
 2 RJ45 LAN Ports 1*10/100/1000M and 1*10/100 Base-TX Ethernet ports
 4 USB ports (V2.0)
 1 RS-232 and 1 RS232/RS422/RS485 ports
 1 DC-In connector
 1 Mini PCI slot
 1 push button power switch
 1 push button reset switch

Storage Bay: 1 2.5" HDD space
 1 CompactFlash slot

LED Indicators: 1 power LED (Green) and 1 HDD LED (Red)
 2 LAN Led (Green)


Power Req.: DC 12V – 24V, 25VA maximum With 2.5" HDD & 19V input voltage.

Operating Temperature: 0–50 degree C. (32–122 degree F.)

Dimensions: 165mm (W) x 120mm (D) x 65mm (H)

Accessory: 1 utility Disc
 1 AC-DC adapter with AC power cable
 1 CBL-KB+MS-Y type keyboard and mouse adapter cable
 1 2-pin apartable terminal block.
 1 44-pin flat cable and 4 screws for fixing and connecting a 2.5" hard disk drive.

Optional Item: 1 FX5504 K1 or FX5404K1 Universal fixers

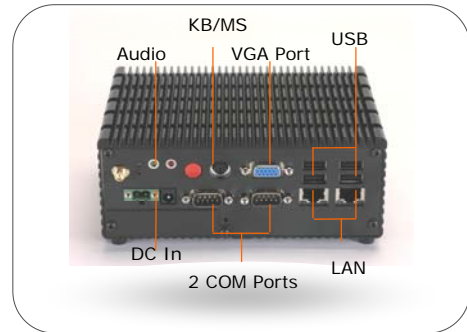

Ordering Information

Model	Description	Drivers
FX5404	Intel Celeron-M Embedded System with 2 LANs,2 COM ports, 4 USB, Audio and 512MB DDR RAM.	* VGA/Audio: WinXP/2K * LAN Novell 3.X / 4.X Win95/98/NT, OS2, Linux NDIS, MSLAN